


Important:

- ◆ You must have access to the space behind the mounting area to properly secure the radio to the mounting bracket.
- ◆ If you are installing the mounting bracket in an area exposed to severe conditions or salt spray, be sure to use mounting screws treated to resist corrosion, or use marine-grade silicone to protect the mounting screws from corrosion.

What You Need

- ◆ Radio
- ◆ Mounting knobs supplied with radio
- ◆ Mounting bracket
- ◆ This instruction sheet
- ◆ Scissors
- ◆ 4 mounting screws with heads slightly larger than holes in bracket
- ◆ Drill with drill bit slightly narrower than the mounting screws
- ◆ Screwdriver (for attaching mounting screws)
- ◆ Saw (for cutting mounting area)
- ◆ Tape (to affix template to mounting location)

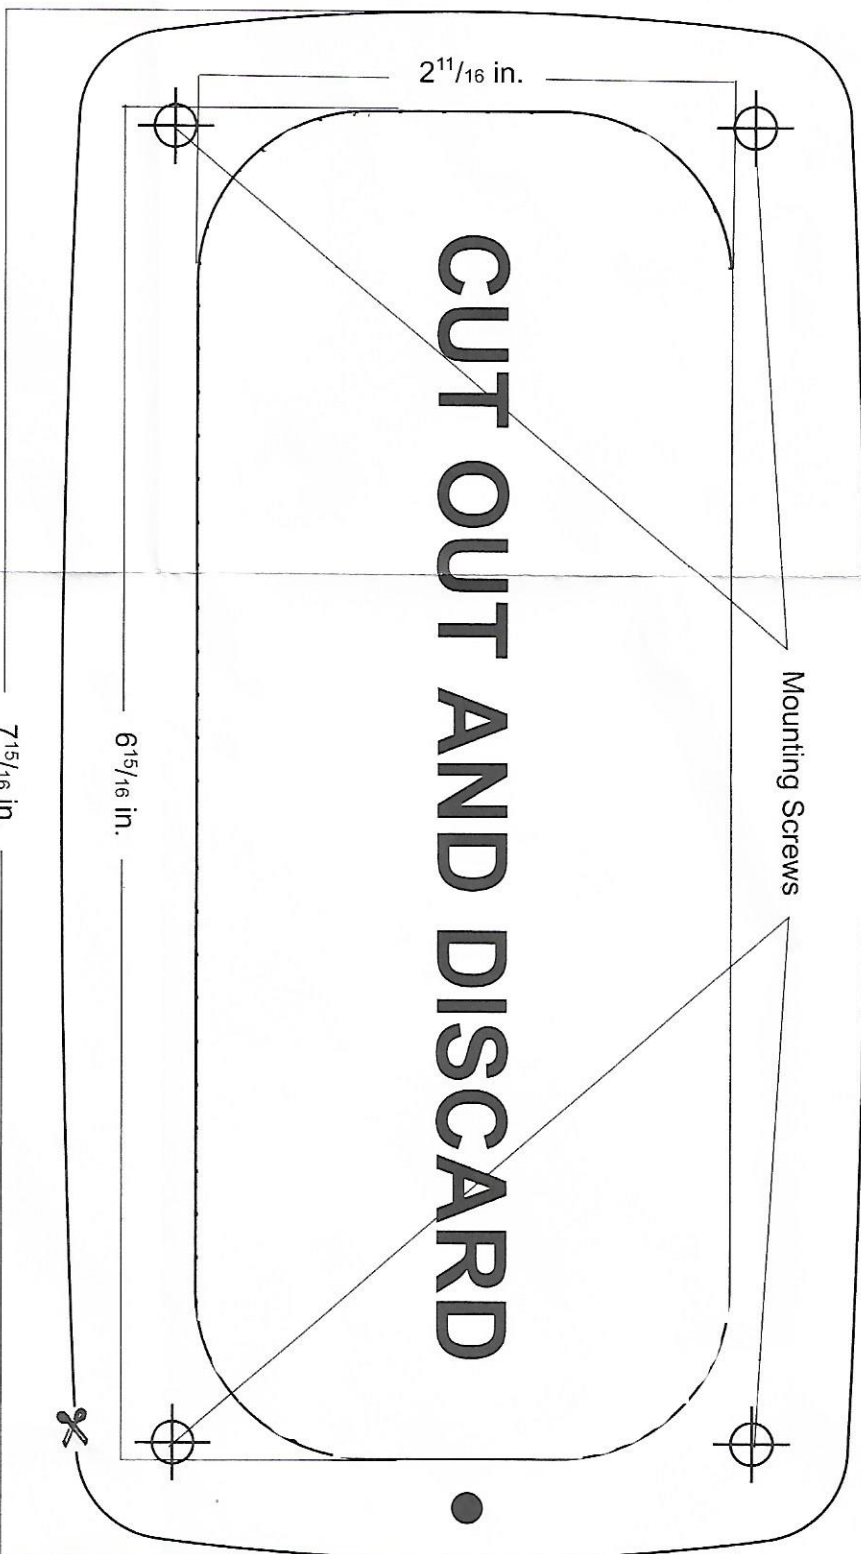

FMB322W (White) / FMB322B (Black)

Mounting Instructions

1. Cut template from this page on line indicated by scissors.
2. Use tape to affix template to desired location on mounting surface.
Caution: Find out what is in the area behind the mounting location before cutting or drilling there. Do not let the saw or drill bit damage wires or equipment behind the mounting location.
3. Cut out area on mounting surface indicated by CUT OUT AND DISCARD on template.
4. Drill holes for mounting screws in the locations indicated on the template.
5. Remove template then securely attach mounting bracket to mounting surface using mounting screws (not supplied).
6. Slide radio into mounting bracket.
7. Secure radio to mounting bracket using the standard mounting bracket knobs supplied with radio.